PROJECT: _____ **ITEM NO.:** _____

APPLICATION: Designed for large volume usage of steaming hot water. Up to 100 cups of 200˚ hot water per hour are provided by the system's 2/3 gallon tank. Saves time, work and water — you only heat the water you use.

MODEL H778
Hot Water Dispenser

FEATURES

- Foodservice grade heating element provides 100 cups of near-boiling water per hour
- Traditional twist-handle operation
- Chrome-plated faucet completely insulated from 200°F water
- Elevated spout provides access for large vessels
- 2/3 gallon Stainless Steel Tank construction for longer life
- Easy-to-adjust temperature control
- Mounts in standard sink opening or 1¼" drilled hole
- Tool-free tank connections and dry start protection for easy installation
- 1-year full warranty on parts and labor

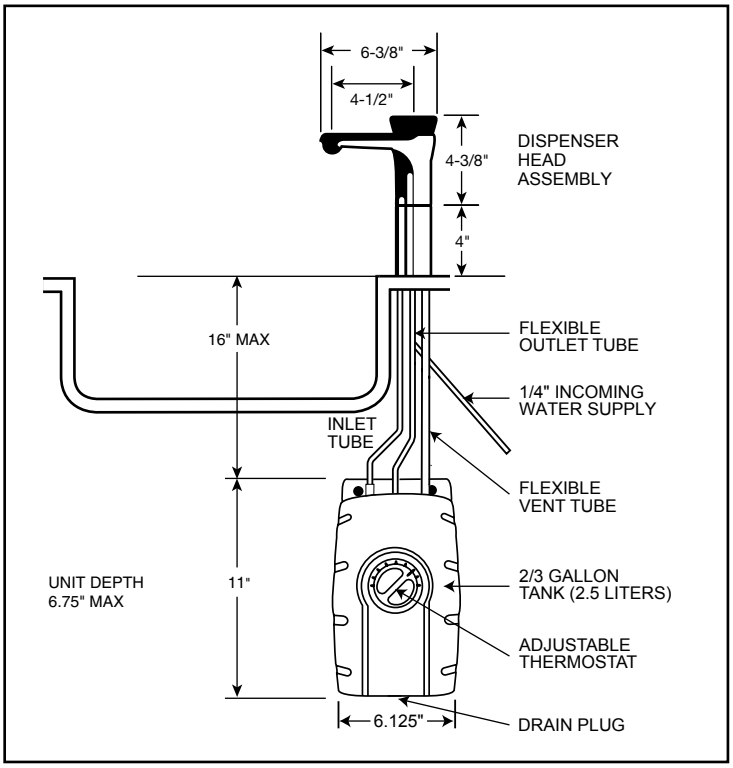

SPECIFICATIONS

Capacity	2/3 gallon tank dispenses 100 cups of 200ºF water per hour
Electrical	120 volts A.C., 1300 watts, 10.8 amp heating element with 36" cord and grounded plug
Thermostat	Snap action, adjustable from 160°F to 210ºF (factory pre-set at approximately 200°F)
Insulation	Meets U.L. 94HF-1 flammability specification
Valve	Instant, self-closing
Recommended Supply Pressure	30-125 psi
Shipping Weight	Approximately 9.5 lbs.

To ensure optimum performance, maximum distance between tank and dispenser head should be 16" or less

Our products appear on ***The KCL CADalog*** CD-ROM based CAD Foodservice Symbol Library. More information is available from **Kochman Consultants, Ltd.** at www.kclcad.com.

4700 21st STREET
RACINE, WI 53406
TEL: 800-845-8345
FAX: 262-554-3620
www.insinkerator.com

The Emerson logo is a trademark and a service mark of Emerson Electric Co.

InSinkErator is a division of Emerson Electric Co. © InSinkErator 2006 Printed in USA Form No. F185-06E-19-02